

PRODUCT DATASHEET

MAX300-LG

Laboratory Gas Analyzer



Fast Response

Process Control

Stable Measurement

- Real-Time Gas Analysis
- Catalysis Monitoring
- Trace Gas Detection
- Environmental Research
- Multipoint Process Control

SPECIFICATIONS

System Highlights

Detectable compounds:	Any gas or vapor sample
Detection range:	– Faraday detector: 100% – 5 ppm – Electron multiplier: 100% – 5 ppb* – Membrane inlet: 100% – 10 ppt*
Analysis rate:	0.005 – 16 seconds per component – User selectable
Number of components:	Unlimited
Number of analysis routines:	Unlimited
Number of user configurable data tags:	Unlimited
Precision:	<0.05% RSD over 24 hours**
Stability:	<0.5% RSD over 30 days**

Ionization energy control for reduced fragmentation

Automated detector switching within a single scan

Filaments:	Two, one active and one spare with automatic switchover
Analyzer maintenance:	1-3 years [†]
Roughing pump:	6-12 months [†]
Manual or fully automated calibration and validation:	3-12 month calibration intervals
Mass range options:	1-250, 300, 500 amu

19 mm High-transmission quadrupole filter

* Matrix dependent. Documented on trace air components and benzene.

** Based on the analysis of 1% argon, scan speed 1 second per analysis with no recalibration or intervention of any kind.

[†] Application dependent.

MAX300-LG System Specifications

Power Supply Options:

- 110 vAC +/- 10% vAC 50/60 hz, 10 Amp Circuit
- 230 vAC +/- 10% vAC 50/60 hz, 10 Amp Circuit

Power Consumption:

- Nominal 700 Watts

Weight:

- Approximately 165 lbs (75 kg)
- Optional cart: 40 lbs (18 kg)

Ambient Requirements:


- 55°F to 80°F (13°C to 27°C)
- Area Classification: General Purpose

Relative Humidity:


- 0-90% non-condensing

Data System and Communications:

- System control interface options: Ethernet or USB
- Login security levels: Administrator, User, Viewer
- External communications: Ethernet, Modbus serial, digital I/O, analog I/O, OPC

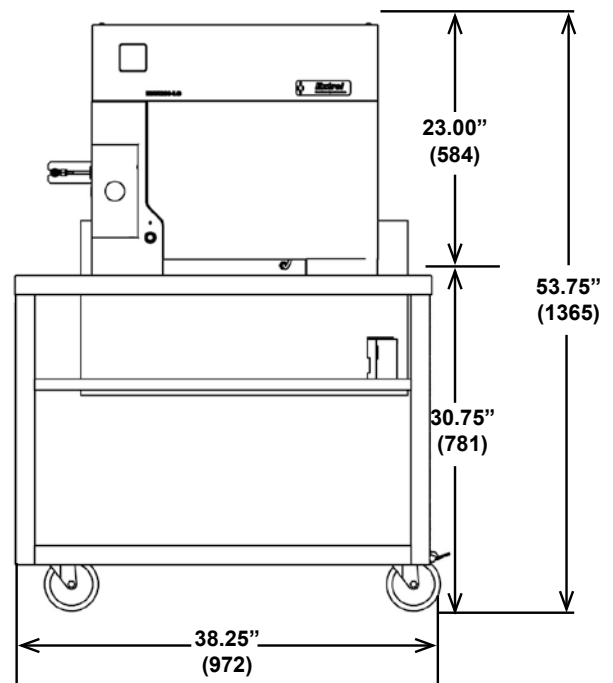

MAX300-LG enclosure with cart

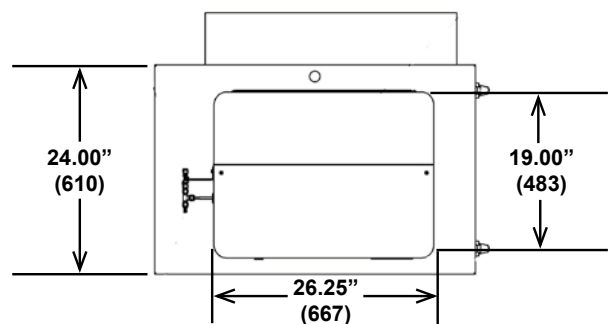

MAX300-LG enclosure with cart top view.

Dimensions shown in inches [cm]

Exceptional Worldwide Service and Support

For over 55 years, Extrel has been committed to providing the highest quality support services for thousands of instruments installed worldwide. Factory trained and certified personnel offer industry-leading support to Extrel customers at every stage of their analytical process.

PREMIUM INSIGHTS – GAIN REAL-TIME INSIGHT INTO YOUR PROCESS

Process Insights' products and solutions deliver innovative and differentiated analysis and measurement solutions and technologies that add high value to our customers and protect the environment.

Our commitment is to deliver smart and affordable innovation that optimizes process, improves safety, and transforms our world.

CENTERS OF EXCELLENCE

PROVIDING PROVEN SOLUTIONS FROM A GLOBAL TECHNOLOGY LEADER

Extrel CMS

575 Epsilon Drive
Pittsburgh, PA 15238
USA
+1 412 963 7530
www.extrel.com
info@extrel.com
support@extrel.com

Process Insights – The Americas

4140 World Houston Parkway
Suite 180
Houston, TX 77032
USA
+1 713 947 9591
info@process-insights.com

Process Insights – EMEA

ATRICOM
Lyoner Strasse 15
60528 Frankfurt
Germany
+49 69 20436910
info@process-insights.com

Process Insights – APAC

Wujiang Economic and Technology
Development Zone
No. 258 Yi He Road, 215200 Suzhou
Jiangsu Province China
+86 400 086 0106
info@process-insights.com

OUR PREMIUM GLOBAL BRANDS

